

Network Video Recorder

NVR302-E-P Series



Key Features


- 8/16-channel input
- Third-party IP cameras supported with ONVIF conformance
- Support 1-ch HDMI, 1-ch VGA, HDMI at up to 4K(3840x2160) resolution
- Up to 12 Megapixels resolution recording
- Support H.265/H.264 video formats
- Accurate retrieval, instant playback
- Up to 8TB for each disk
- Support various VCA detection alarm and VCA search
- Plug & Play with up to 8/16 independent PoE network interfaces
- Support for P2P, UPnP, NTP, DHCP, PPPoE
- Support for mobile client access

Specifications

Model	NVR302-08E-P8	NVR302-16E-P8	NVR302-16E-P16
Video/Audio Input			
IP Video Input	8-ch	16-ch	
Two-way Audio Input	1-ch, RCA		
Network			
Incoming Bandwidth	80Mbps	160Mbps	
Outgoing Bandwidth	160Mbps	320Mbps	
Remote Users	128		
Video/Audio Output			
HDMI/VGA Output	VGA: 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz HDMI: 4K (3840x2160) /60Hz, 4K (3840x2160) /30Hz, 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz		
Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF		
Audio Output	1-ch, RCA		
Synchronous Playback	8-ch	16-ch	
Decoding			
Compression	H.265/H.264		
Live view/ Playback	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF		
Capability	4 x 12MP@20, 4 x 4K@30, 8 x 4MP@30, 16 x 1080P@30		
Hard Disk			
SATA	2 SATA interfaces		
Capacity	up to 8TB for each disk		
External Interface			
Network Interface	1 RJ-45 10M/100M/1000M self-adaptive Ethernet Interface		
USB Interface	Front panel: 1 x USB2.0, Rear panel: 1 x USB3.0		
Alarm In	4-ch		
Alarm Out	1-ch		
PoE			
Interface	8 independent 100 Mbps PoE network interfaces	16 independent 100 Mbps PoE network interfaces	
Max Power	Max 30W for single port Max 130W in total (16.25W for each)	Max 30W for single port Max 240W in total (15W for each)	
Supported Standard	IEEE 802.3af/at		
General			
Power Supply	100 ~ 240 V AC		


Consumption (without HDD)	≤ 20 W	
Working Temperature	-10°C ~ + 55°C (+14°F ~ +131°F)	
Working Humidity	10% ~ 90%	
Dimensions	380 mm × 315mm × 46 mm	
Weight (without HDD)	≤2.42kg (5.34lb)	≤2.48kg (5.47lb)

Dimensions

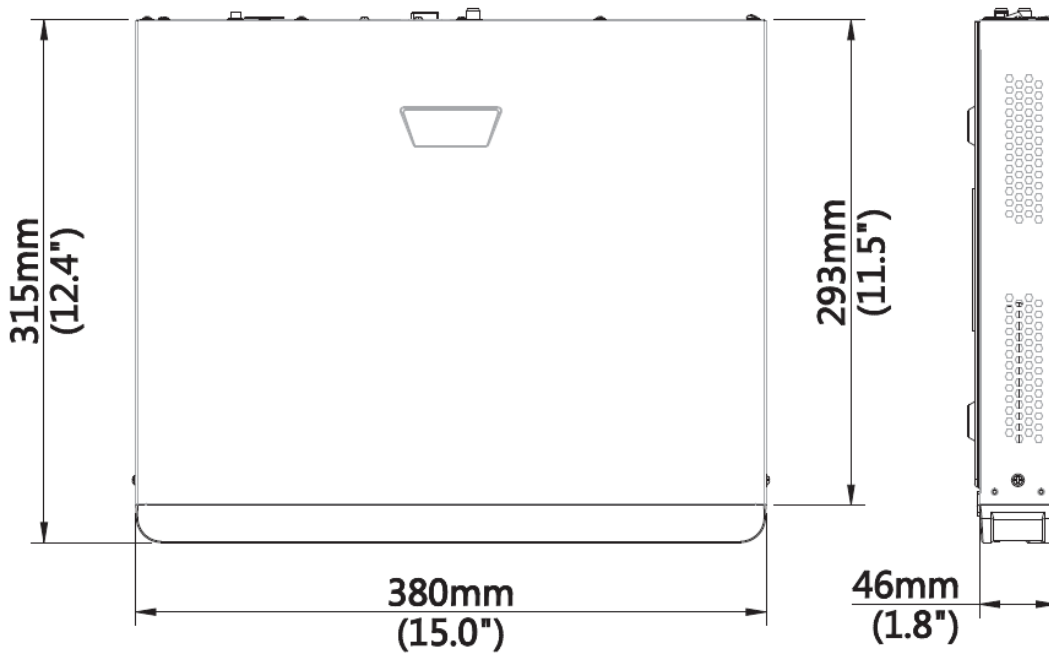

Rear Panel

Take **NVR302-16E-P8** for example

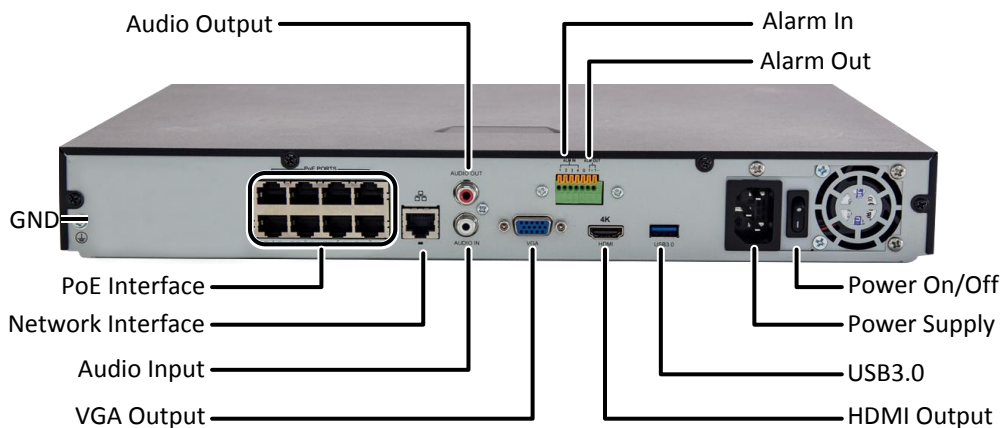

Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://sgcdn.uniview.com>

©2016-2017 Zhejiang Uniview Technologies Co.,Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.